




by VERSA-GARD[®]

Model: **VGCP6S**

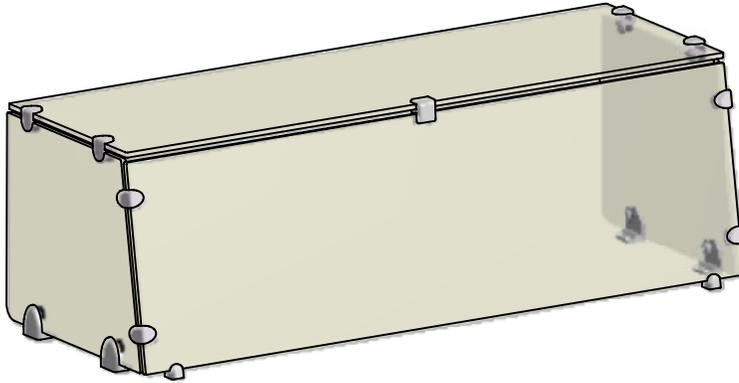

1 - Section Unit

Up to 96" O.A. length max.
with added center bracket


(Patent Pending)

SPECIFICATIONS:

Full service food protector. All component hardware CNC machined in 6061-T6 aluminum to $\pm .002"$. All glass panels are 3/8" clear tempered and meet ANSI Z97.1 specifications for safety performance and ASTM C1048-04 specifications for heat treated glass. All hardware supplied in a satin clear anodized aluminum finish unless otherwise specified. All glass with ground and polished edges.

ACCESSORIES:

- | | | |
|---|--|---|
| <input type="checkbox"/> T8 Fluorescent Light | <input type="checkbox"/> Xenon Light | <input type="checkbox"/> Hatco GRA Foodwarmer |
| <input type="checkbox"/> T5 Fluorescent Light | <input type="checkbox"/> Marsal Halogen Foodwarmer | <input type="checkbox"/> Hatco GRAL Foodwarmer w/ Light |
| <input type="checkbox"/> Halogen Light | <input type="checkbox"/> Hatco GRN Foodwarmer | <input type="checkbox"/> Hatco Halogen Foodwarmer |

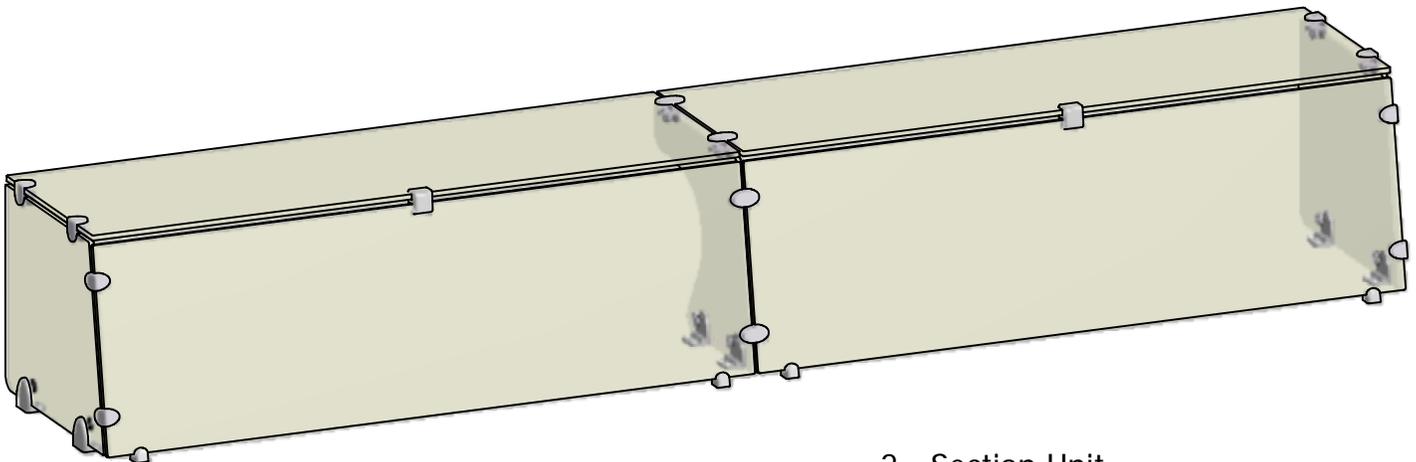

2 - Section Unit

Up to 192" O.A. length, (2) 96" sections max.
With added center brackets





by VERSA-GARD®

Model: **VGCP6S**

Item No: _____

Qty: _____

Length (O.A.): _____

FINISH:

- Clear Anodized Aluminum
- Anodized Aluminum Custom Color
(Contact Factory)

GLASS:


Options

- Frosted
- Anti - Reflective
- Starfire® - Clear

MOUNT:




- Conceal Mount
- Surface Mount

(Patent Pending)

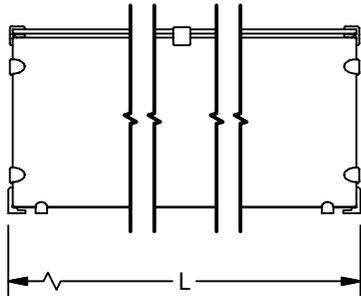

- Overall Dimensions -

- L / L1 - 96" Max
- L2 - 192" Max

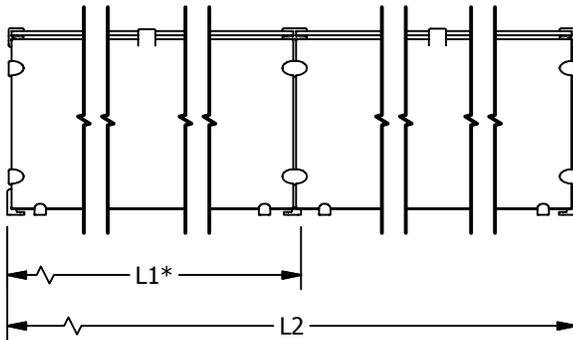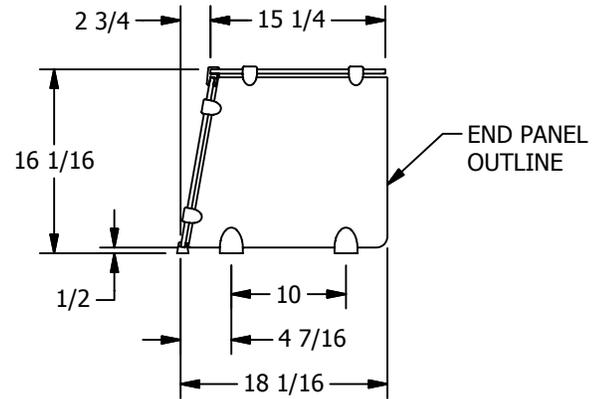

(* - Middle support glass panel is centered unless L1 dimension is specified)

NSF/ANSI 2 Applicable Codes:

5.35.12 Food Shields for use on cafeteria counters

5.35.12.1 The sum of a shield's protected horizontal plane (X) and its protected vertical plane (Y) shall be greater than or equal to 32 inches. When (X) = 0, (Y) shall be a minimum of 60 inches from finished floor

5.35.12.2 Maximum distance from the bottom edge of the front vertical glass and counter top shall be 1.5 inches

5.35.12.3 Maximum distance between the vertical glass and horizontal glass is 3/4 inch

5.35.12.4 Minimum horizontal distance between the front inside edge of displayed food and the bottom leading edge of the shield is 1.5 inches

5.35.6 A vertical barrier (end shield) shall be provided at each end of a foodshield. The vertical barrier shall be a minimum of 18 inches deep front to back) beginning at the bottom leading edge of the foodshield. The minimum height of the vertical barrier shall be equal to the overall height of the foodshield. The maximum distance from the bottom edge of the vertical barrier and counter shall be 1.5".

5.35.6.1 A foodshield intended to be installed a maximum of 3" (76mm) from a building wall perpendicular to the foodshield is exempt from the requirements of 5.35.6 provided that the height of the building wall is not lower than the overall height of the foodshield.

